

INTRODUCING


ULTRA SLIM

ONE WAY INVERTER CASSETTE AC


KEY FEATURES




6-IN-1 GEAR CONTROL

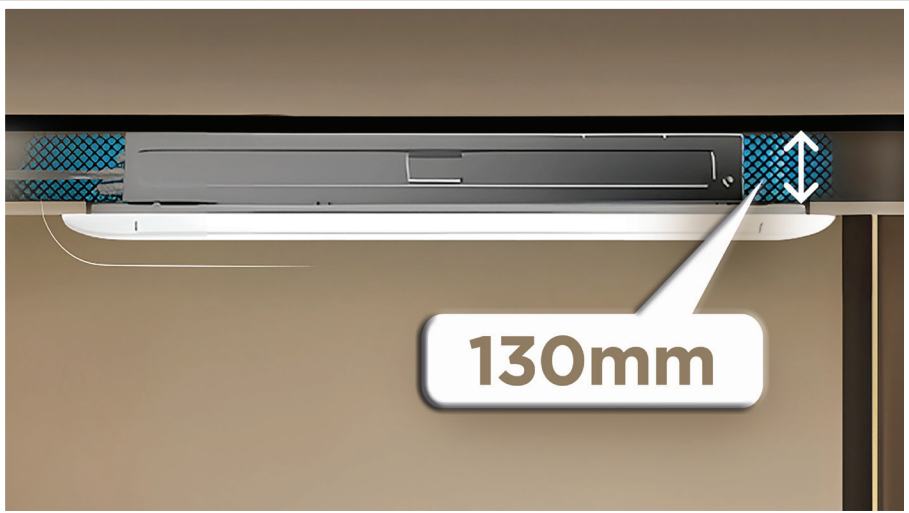

ULTRA SLIM

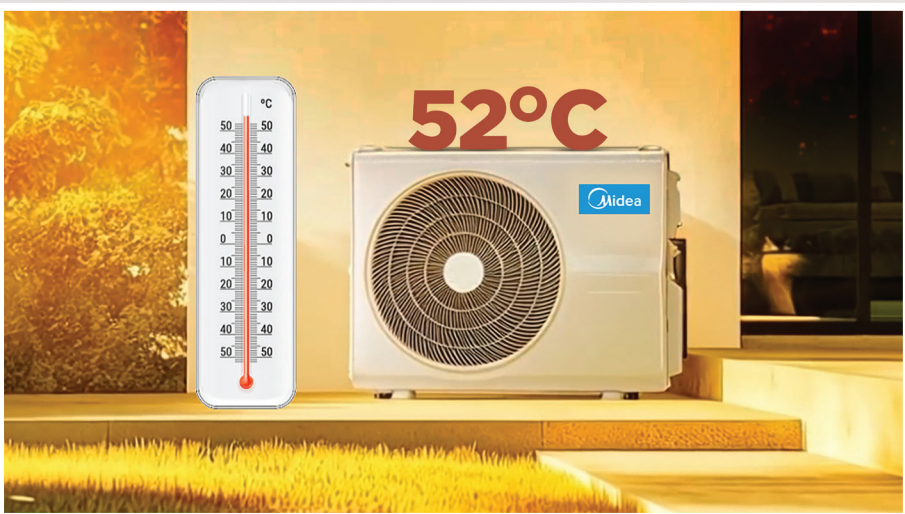

HIGH AMBIENT WORKING

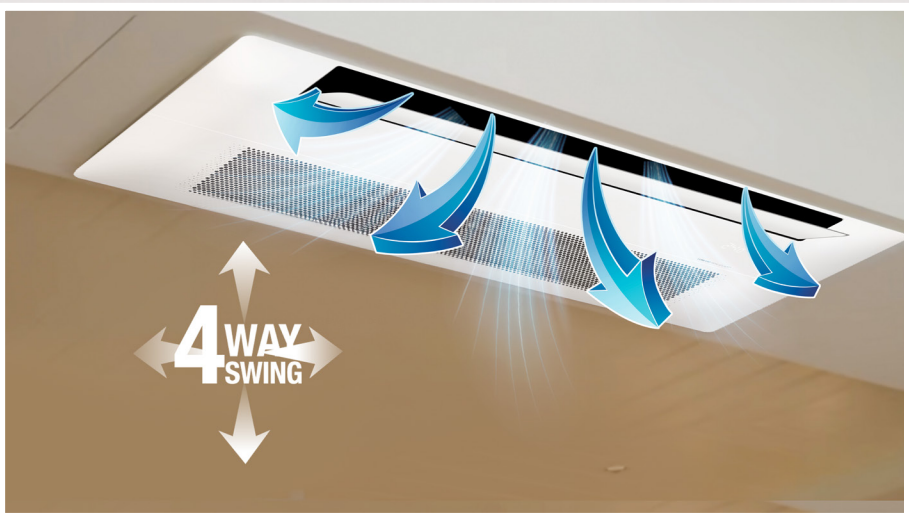

4 WAY SWING



3 STAR
INVERTER AC

AVAILABLE IN
1.5 T & 2.0 T CATEGORIES

*T&C Apply
BEE Star ratings vary from model to model



INTRODUCING

ULTRA SLIM

ONE WAY INVERTER CASSETTE AC

Technical Specification					
Model No.				MOI018RY3CR3S6	MOI024RY3CR3S6
Tonnage Category		BTU/H		18K	24K
Full Load Capacity		Watts		4,800	6,100
Half Load Capacity		Watts		2,400*	3,050*
Full Load Power Input		Watts		1,418*	1,860*
Half Load Power Input		Watts		497*	614*
Annual Power Consumption		KWH		845.13*	1073.62*
ISEER Value		W/W		4.40	4.40
BEE Star					
Power Supply				1 Phase, 230 V+/-10%, 50 Hz	
Indoor Unit	Airflow	H/M/L	m3/h	800/650/500	850/700/500
	Sound Level	H/M/L	dB(A)	44/40/35	46/44/35
	Net Dimensions	Unit (WxDxH)	mm	1180x450x130	
		Panel (WxDxH)	mm	1480x500x34	
	Net Weight	Unit/ Panel	Kg	18/ 5.4	
Outdoor Unit	Compressor		Type	DC Inverter Rotary	
	Refrigerant		Type	R32	
	Dimensions	Unit (WxDxH)	mm	790 x 280 x 542	890 X 340 X 670
	Net Weight	Unit	Kg	24.2	34
	Operation Temp Range		°C	18 ~ 52	
Pipe Connections		Liquid (Flare)	mm/ Inch	Ø6.35 / 1/4"	Ø6.35 / 1/4"
		Gas (Flare)	mm/ Inch	Ø12.7 / 1/2"	Ø12.7 / 1/2"
		Drain	mm/ Inch	OD Ø25.4 / 1"	
Max. Inter-unit Pipe Length			Meters	20	25
Max. Installation Level Difference			Meters	8	10
Standard Controller (Remote)				Wireless Controller	

* All specifications as per IS1391 (Part 2) Room air-conditioner. BEE (Bureau of Energy Efficiency) an autonomous body under Ministry of Power, Government of India, started this initiative of star rating basis ISEER ranging from 1 Star to 5 Star, Annual Electricity Consumption (Units of kWh basis 1600 hrs), Applicable up to 3.0TR 1PH product.

**Nominal Cooling capacity/ Power Input.